

B.Tech II Year I Semester (R15) Supplementary Examinations June 2017

**PROBABILITY THEORY & STOCHASTIC PROCESSES**

(Electronics &amp; Communication Engineering)

Time: 3 hours

Max. Marks: 70

**PART - A**  
(Compulsory Question)

\*\*\*\*\*


- 1 Answer the following: (10 X 02 = 20 Marks)
- Write the axioms of probability.
  - A fair die is rolled 5 times. Find the probability that "six" will show 2 times.
  - State central limit theorem.
  - Define correlation coefficient.
  - A random process  $X(t) = A \sin \omega_0 t$ , where  $\omega_0$  is constant and 'A' is a uniform random variable over the interval (0, 1). Find whether X(t) is a stationary process or not.
  - State autocorrelation properties.
  - Find the PSD if  $R_{XX}(\tau)$  is given as  $e^{-2\lambda|\tau|}$ .
  - Calculate the noise equivalent bandwidth of the filter defined with transfer function:  $H(f) = \frac{1}{1+j2\pi fRC}$ .
  - For a random variable with a CDF:  $F_X(x) = (1 - e^{-x}) u(x)$ . Find  $\Pr(X > 5)$  and  $\Pr(X > 5/X < 7)$ .
  - State Wiener – Khintchine theorem.

**PART - B**

(Answer all five units, 5 X 10 = 50 Marks)

**UNIT - I**

- 2 (a) A binary symmetric channel is shown in below. Find the probability of (i)  $A_1$ , (ii)  $A_2$ , (iii)  $P(B_1/A_1)$ , (iv)  $P(B_2/A_2)$ , (v)  $P(B_1/A_2)$ , (vi)  $P(B_2/A_1)$ .

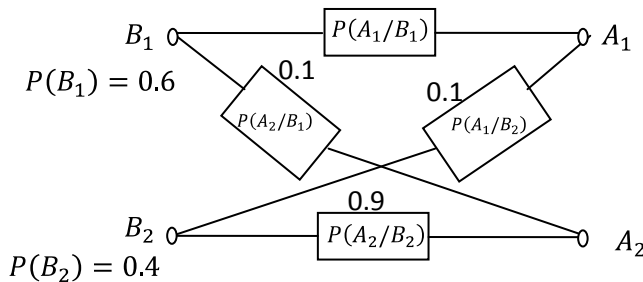

- (b) List the properties of conditional density function.

**OR**


- 3 (a) Write and plot probability density function and probability distribution function of the following random variables:
- Uniform random variable.
  - Exponential random variable.
  - Laplace random variable.
  - Rayleigh random variable.
- (b) A random variable X is defined as below, over the interval (0, 1). Find its conditional CDF of X given

$$\text{that } X < \frac{1}{2}; F_X(x) = \begin{cases} 0, & x < 0 \\ x, & 0 \leq x < 1 \\ 1, & x > 1 \end{cases}$$

Contd. in page 2

## UNIT - II

- 4 (a) Find  $f_Y(y)$  for the square law transformation  $Y = T(X) = Cx^2$  shown below.

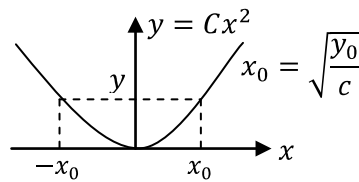

- (b) Find whether the two random variables  $X$ , and  $Y$  are statistically independent or not if the joint p.d.f is given by  $f_{XY}(x, y) = \frac{1}{12} u(x) u(y) e^{-\left(\frac{x}{4}\right) - \left(\frac{y}{3}\right)}$ .

OR

- 5 (a) Find the p.d.f of a random variable  $W$  defined as sum of  $X$ ,  $Y$  with densities shown below;

$$f_X(x) = \frac{1}{a} [u(x) - u(x - a)]$$

$$f_Y(y) = \frac{1}{b} [u(y) - u(y - b)]$$

With  $a < b$

- (b) An exponential random variable has a p.d.f as shown below  $f_X(x) = be^{-bx} u(x)$  with mean value  $\frac{1}{b}$ . Find its coefficient of skewness and kurtosis.

## UNIT - III

- 6 (a) Two random process  $X(t)$  and  $Y(t)$  defined as below

$$X(t) = A \cos \omega_0 t + B \sin \omega_0 t$$

$$Y(t) = B \cos \omega_0 t - A \sin \omega_0 t$$

Where  $A$ ,  $B$  are uncorrelated random variables with mean '0' and same variance and  $\omega_0$  is constant. Find whether  $X(t)$  and  $Y(t)$  are jointly wide-sense stationary or not.

- (b) A random process  $X(t) = a \sin(\omega_0 t + \theta)$  where  $\theta$  is uniform over  $[0, 2\pi]$ . Find whether it is ergodic or not.

OR

- 7 (a) Find the mean, variance of the process  $X(A)$ , with ACF given as  $R_{XX}(\tau) = 25 + \frac{4}{1+6\tau^2}$ .  
 (b) Define Poisson random process and list the conditions. Write the p.d.f and find its mean and variance.

## UNIT - IV

- 8 (a) State the properties of power density spectrum.  
 (b) Find power spectrum of WSS noise process  $N(t)$  with autocorrelation function defined as below.  
 $R_{NN}(\tau) = P e^{-3|\tau|}$


OR

- 9 (a) List the properties of cross-power density spectrum.  
 (b) Find the cross-correlation function for a cross-power density spectrum given below:

$$f_{XY}(\omega) = \frac{8}{(\alpha + j\omega)^3}$$

## UNIT - V

- 10 Find the output power for the LTI system shown below with input power spectral density  $f_{XY}(\omega) = \frac{N_0}{2}$ .

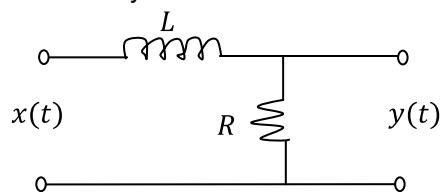

OR

- 11 For LTI system with impulse response  $h(t)$ , input  $X(t)$ , and output  $Y(t)$ . Prove the following:

(i)  $\mu_Y(t) = \mu_X H(0)$

(ii)  $R_{YY}(\tau) = R_{XX}(\tau) * h(\tau) * h(-\tau)$

(iii)  $f_{YY}(f) = f_{XX}(f) |H(f)|^2$  (iv)  $\chi_{YY}(f) = \chi_{XX}(f) H(f)$

\*\*\*\*\*  
[www.intutorialline.com](http://www.intutorialline.com)